
EcoLite™
Leader in LED Lighting

VESTA SURFACE DISK
SPECIFICATION SHEET
ECO-LS-DK4

Vesta Surface Disk LED Residential Down Light I

ECO-LS-DK4
120-277

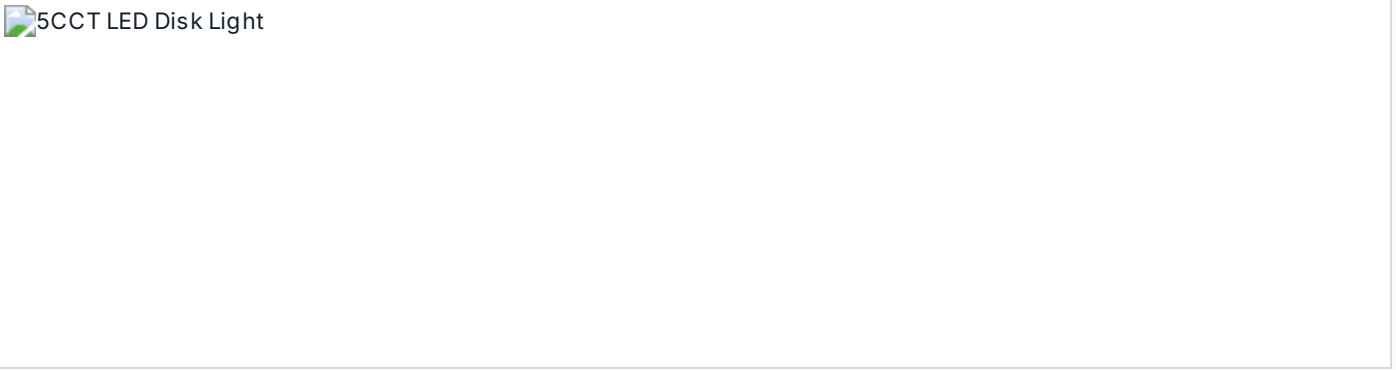

KEY SPECS

POWER	COLOR	EFFICACY	OPTICS
10 / 15W	**5CCT**	**80lm/W**	**120°**
Wattage options	2700 / 3000 / 3500 / 4000 / 5000 K	System efficacy	Beam angle

Vesta Surface Disk is a low-profile downlight with a frosted polycarbonate diffuser and durable iron housing, available in 4-inch and 6-inch apertures for surface, retrofit, or junction-box installation. Field-selectable CCT (2700K-5000K) and 90+ CRI deliver flattering, uniform illumination with a 120° beam. The 120 V driver supports smooth 100%-5% triac dimming. Wet-location rated and ETL, cETL, and ENERGY STAR listed — ideal for bathrooms, porches, and closets. Backed by EcoLite's 10-year non-prorated warranty.

- Bathrooms & laundry rooms
- Porches & covered exteriors
- Office & meeting rooms
- Retail & restaurant lighting

FEATURES

01 4-inch and 6-inch low-profile apertures
02 Field-selectable 5-CCT switch (2700K-5000K)
03 90+ CRI for accurate color rendering
04 Smooth 100%-5% triac dimming
05 Wet-location rated for damp and outdoor areas
06 ETL, cETL, and ENERGY STAR listed

ETL LISTED US · cETL LISTED US · ENERGY STAR · 10 Year Non-Prorated Warranty · COLOR SELECT FIELD SELECTABLE · WET LOCATION RATED


01 ORDER INFORMATION

SKU / MODEL	SIZE	WATTAGE	CCT	VOLTAGE
ECO-LS-DK4-10W-5CCT	4 in	10 W	2700/3000/3500/4000/5000 K	120-277
ECO-LS-DK6-15W-5CCT	6 in	15 W	2700/3000/3500/4000/5000 K	120-277

02 ELECTRICAL CHARACTERISTICS

SPECIFICATION	10 W	15 W
Size	4 in	6 in
LED Driver	DOB Driver	
Wattage	10 W	15 W
Lumen Output	800 lm	1,200 lm
Efficacy (lm/W)	80 lm/W	
CRI	>90	
Color Temperature (CCT)	2700K / 3000K / 3500K / 4000K / 5000K (field-selectable)	
Input Voltage	120 V AC	
Beam Angle	120°	
Operating Temperature	-20 to +45°C	
Junction Temperature	<75°C	
Lamp Efficiency	≥90%	
Certifications	ENERGY STAR, ETL, cETL	
HID Equivalent	18-27 W MH/HPS	27-36 W MH/HPS

03 ACCESSORIES & MOUNTING

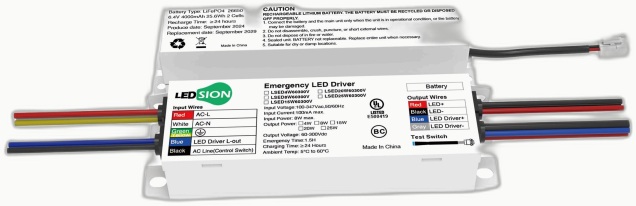

EMERGENCY DRIVER 8W

ECO-LSED8W60300V



EMERGENCY DRIVER 8W

ECO-LSH-08170-HY

04 DIMENSIONS

MODEL	DIAMETER	HEIGHT
ECO-LS-DK4-10W-5CCT	5.88” / 149 mm	0.91” / 23 mm
ECO-LS-DK6-15W-5CCT	7.22” / 183 mm	0.87” / 22 mm

Round footprint · Dimensions ±0.2” · inches [mm]

05 SAFETY WARNING

⚠ READ BEFORE INSTALLATION

1. Installation must be performed by a qualified, licensed electrician in accordance with all applicable national and local electrical codes.