
EcoLite™
Leader in LED Lighting

STONEHENGE GARDEN BOLLARD
SPECIFICATION SHEET
ECO

Stonehenge Garden Bollard LED Light II

ECO
120–277 / 347 V AC

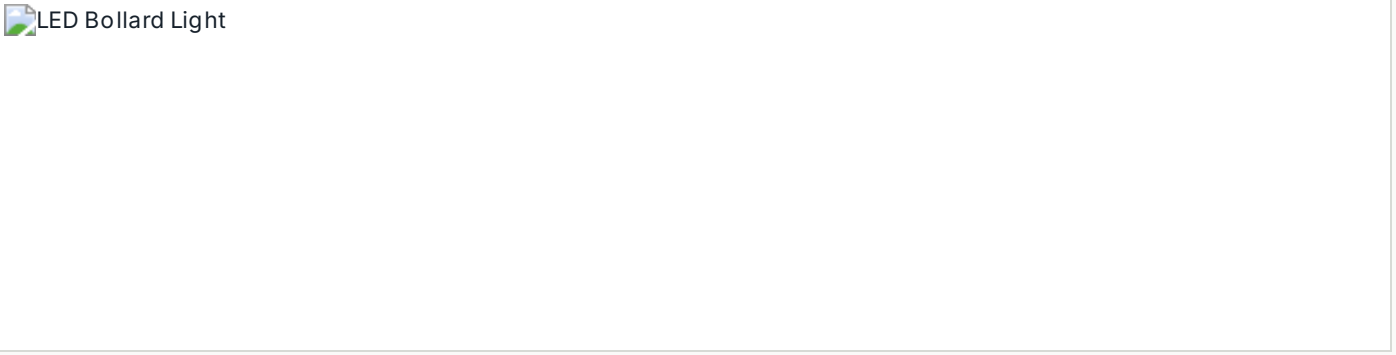

KEY SPECS

POWER	COLOR	OPTICS
12–24W	3CCT	III
Field-selectable output	3000 / 4000 / 5000 K	NEMA distribution

Stonehenge Garden Bollard is a CCT-and wattage-selectable outdoor bollard built around a die-cast aluminum housing with a corrosion-resistant powder-coated finish in dark bronze (white optional). A 0-10V dimmable driver accepts 120–277 V AC (US) or 120–347 V AC (Canada), and field-selectable optics support Type III or Type V distributions with optional louver, glare shield, or diffuse lens. Three anchor bolts ship standard for concrete-pad mounting, with optional emergency battery backup. cULus wet-location listed and DLC Standard/Premium qualified, backed by an EcoLite 10-year non-prorated warranty.

- Pathway & walkway lighting
- Perimeter & security lighting
- Commercial landscape lighting
- Public spaces & plazas

FEATURES

01 Field-selectable wattage (12 / 15 / 24 W)
02 Field-selectable CCT (3000 / 4000 / 5000 K)
03 Type III or Type V distribution options
04 Die-cast aluminum housing with powder-coat finish
05 0-10V dimmable driver
06 Optional emergency battery backup

c UL us LISTED · DLC LISTED · DLC LISTED PREMIUM · 10 Year Non-Prorated Warranty

POWER SELECT
MULTI-WATTAGE

COLOR SELECT
FIELD SELECTABLE

01 ORDER INFORMATION

SKU / MODEL	SIZE	WATTAGE	CCT	VOLTAGE
ECO-24W	24 in	12/15/24 W	3000/4000/5000 K	120–277 / 347 V AC
ECO-24W-2	36 in	12/15/24 W	3000/4000/5000 K	120–277 / 347 V AC
ECO-24W-3	42 in	12/15/24 W	3000/4000/5000 K	120–277 / 347 V AC

02 ELECTRICAL CHARACTERISTICS

SPECIFICATION	12/15/24 W
Size	24 in / 36 in / 42 in
Wattage	12 / 15 / 24 W (field-selectable)
Lumen Output (max @ 5000K)	2,880 lm (Type V) / 2,520 lm (Type III)
Color Temperature (CCT)	3000 / 4000 / 5000 K (selectable, 5000 K default)
Input Voltage	120–277 V AC (US) / 120–347 V AC (Canada), 50/60 Hz
Input Current @ 120V	0.11 / 0.14 / 0.22 A (12 / 15 / 24 W)
Input Current @ 277V	0.05 / 0.06 / 0.10 A (12 / 15 / 24 W)
Input Current @ 347V	0.04 / 0.05 / 0.08 A (12 / 15 / 24 W)
LED Driver	0-10V dimmable (dimming wire not led out from fixture)
Beam Angle	Type III or Type V (lens change required for Type III)
Operating Temperature	-40 to +50°C (-40 to +122°F)

03 ACCESSORIES & MOUNTING



PHOTOCELL SENSOR

ECO-X-PC-C



EMERGENCY BATTERY BACKUP 4W

ECO-X-EBB27-4WDC



T3 PC LENS

ECO-X-BLA-PCLS-T3



180° GLARE SHIELD

ECO-X-180DGS



LOUVRE OPTIC 4-PACK

ECO-X-LOV

04 DIMENSIONS

MODEL	DIAMETER	HEIGHT
ECO-BLA-24	8.66” / 220 mm	25” / 635 mm
ECO-BLA-36	8.66” / 220 mm	36.14” / 918 mm
ECO-BLA-42	8.66” / 220 mm	42.32” / 1075 mm

Round footprint · Dimensions ±0.2” · inches [mm]

05 SAFETY WARNING

⚠ READ BEFORE INSTALLATION

1. Installation must be performed by a qualified, licensed electrician in accordance with all applicable national and local electrical codes.