
EcoLite™
Leader in LED Lighting

STRATUS EDGE SELECT FRAME LIGHT
SPECIFICATION SHEET
ECO-J-JEN-F2-K40W-3065

Stratus Edge Select Frame Light III

ECO-J-JEN-F2-K40W-3065

120-277

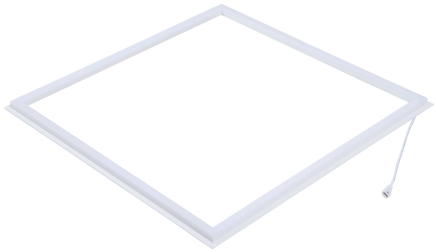

KEY SPECS

POWER	COLOR	EFFICACY	OPTICS
20–60W	**5CCT**	**125lm/W**	**120°**
Field-selectable output	3000 / 3500 / 4000 / 5000 / 6500 K	System efficacy	Beam angle

Stratus Edge Select Frame Light is a switchable-output frame panel with a sleek, modern housing available in 2x2 and 2x4 formats. Advanced optics deliver a 120° beam with CRI above 80 and uniform illumination matching traditional LED panels. It runs on 120–277 V input with a power factor above 0.95 and smooth 0-10V dimming. The fixture drops into standard T-bar grid ceilings or installs via suspended mounting hardware. ETL listed for damp locations and DLC Premium qualified for maximum rebate eligibility, backed by EcoLite's 10-year non-prorated warranty

Offices & retail | Schools & education | Restaurants | Residential spaces

FEATURES

01 2x2 and 2x4 form factors
02 Field-selectable wattage
03 5-in-1 CCT selectable
04 0-10V dimming
05 ETL listed for damp locations
06 DLC Premium qualified

COLOR SELECT
FIELD SELECTABLE

POWER SELECT
MULTI-WATTAGE

120+ LM/W
HIGH EFFICACY

01 ORDER INFORMATION

SKU / MODEL	SIZE	WATTAGE	CCT	VOLTAGE
ECO-J-JEN-F2-K40W-3065	2x2	20/30/40 W	3000/3500/4000/5000/6500 K	120-277
ECO-J-JEN-F4-K60W-3065	2x4	40/50/60 W	3000/3500/4000/5000/6500 K	120-277

02 ELECTRICAL CHARACTERISTICS

SPECIFICATION	20/30/40 W	40/50/60 W
Size	2x2	2x4
Wattage	20 / 30 / 40 W	40 / 50 / 60 W
Lumen Output	2,500 / 3,750 / 5,000 lm	5,000 / 6,250 / 7,500 lm
Input Voltage	120–277 V	
Operating Frequency	50/60 Hz	
Power Factor	>0.95	
THD	<10%	
Dimming	0-10V dimmable	
CRI	>80	
Beam Angle	120°	
Operating Temperature	-20 to +45°C	

03 ACCESSORIES & MOUNTING



EMERGENCY DRIVER 20W

ECO-LSED20W



EMERGENCY DRIVER 8W

ECO-LSED8W60300V



EMERGENCY DRIVER 8W

ECO-LSH-08170-HY



SURFACE MOUNT KIT 1X4

ECO-J-1X4-MOUNT-KIT



SURFACE MOUNT KIT 2X4

ECO-J-2X4-MOUNT-KIT

04 DIMENSIONS

MODEL	LENGTH	WIDTH	HEIGHT
ECO-J-JEN-F2-K40W-3065	23.75” / 603 mm	23.75” / 603 mm	0.6” / 15 mm
ECO-J-JEN-F4-K60W-3065	47.76” / 1213 mm	23.75” / 603 mm	0.6” / 15 mm

Rectangular footprint · Dimensions ±0.2” · inches [mm]

05 SAFETY WARNING

⚠ READ BEFORE INSTALLATION

1. Installation must be performed by a qualified, licensed electrician in accordance with all applicable national and local electrical codes.