EcoLite™
Leader in LED Lighting

INTERSTELLAR 03 LINEAR LED STRIP
SPECIFICATION SHEET
ECO-J-ST03-4FT40WS-3545K-SB3.5

Interstellar 03 Linear LED Strip Light III

ECO-J-ST03-4FT40WS-3545K-SB3.5 03
120-277



KEY SPECS

POWER	COLOR	EFFICACY	VOLTAGE
24–40W	3CCT	130lm/W	120-277V
Field-selectable output	3500 / 4000 / 5000 K	System efficacy	Input voltage

Interstellar 03 Linear LED Strip is a field-selectable linear strip fixture with a durable housing and non-yellowing polycarbonate lens for even, shadow-free output. High-brightness LEDs deliver >80 CRI illumination through a linkable, continuous-row design with transparent end caps that eliminate dark spots. It runs on 120–277 V input and pairs with standard 0-10V dimmers, with DIP-switch selection of wattage and CCT. Suspension, surface, and continuous-row mounting are supported, plus optional motion-sensor and emergency-backup configurations. ETL listed and DLC Premium qualified for utility rebates, backed by EcoLite's 10-year non-prorated warranty.

- Office & retail lighting
- Schools & healthcare facilities
- Restaurants & hospitality
- Residential spaces

FEATURES

01 2 ft, 4 ft, and 8 ft form factors
02 DIP-switch wattage and CCT selectable
03 Linkable continuous-row design
04 Non-yellowing polycarbonate lens
05 0-10V dimmable
06 ETL listed & DLC Premium

ETL LISTED US · DLC LISTED PREMIUM · THE LED INDUSTRY'S BEST 10 Year Non-Prorated WARRANTY

POWER SELECT
MULTI-WATTAGE

COLOR SELECT
FIELD SELECTABLE

130+ LM/W
HIGH EFFICACY


01 ORDER INFORMATION

SKU / MODEL	SIZE	WATTAGE	CCT	VOLTAGE
ECO-J-ST03-4FT40WS-3545K-SB3.5	4 ft	24/32/40 W	3500/4000/5000 K	120-277
ECO-J-ST03-4FT40WS-3545K-EM8	4 ft	24/32/40 W	3500/4000/5000 K	120-277

02 ELECTRICAL CHARACTERISTICS

SPECIFICATION	24/32/40 W
Size	4 ft
Wattage	24 / 32 / 40 W
Lumen Output	3,120 / 4,160 / 5,200 lm
Color Temperature (CCT)	3500K / 4000K / 5000K tunable
Efficacy (lm/W)	130 lm/W
CRI	>80
Input Voltage	120–277 V
Operating Temperature	-20 to +45°C
Dimming	0-10V dimmable

03 ACCESSORIES & MOUNTING

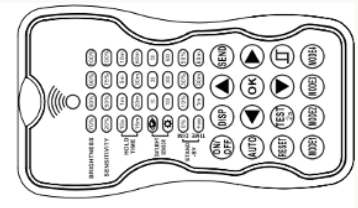

REMOTE CONTROLLER

ECO-J-PT01-RC



REMOTE CONTROLLER

ECO-J-RC-100-J-PT01-RC

04 DIMENSIONS

MODEL	LENGTH	WIDTH	HEIGHT
ECO-J-ST03-4FT40WS-3545K-SB3.5	48” / 1219 mm	2.95” / 75 mm	3.27” / 83 mm

Linear extrusion · Dimensions ±0.2” · inches [mm]

05 SAFETY WARNING

⚠ READ BEFORE INSTALLATION

1. Installation must be performed by a qualified, licensed electrician in accordance with all applicable national and local electrical codes.